



# UNIDRIVE M700



**Manufacturing Automation drive**  
 Class leading induction and servo permanent magnet motor performance, with real-time Ethernet



- Unidrive M100
- Unidrive M200
- Unidrive M300
- Unidrive M400
- Unidrive M600
- Unidrive M700**
- Unidrive M800

0.75 kW – 1.2 MW Heavy Duty  
 (1.0 hp – 1600 hp)  
 200 V | 400 V | 575 V | 690 V






The Unidrive M Manufacturing Automation drive family


## Unidrive M – The Manufacturing Automation drive family tailored to customer needs

Led by the results of extensive customer-driven market research, we have tailored seven Unidrive M feature-sets to specific application needs identified within Manufacturing Automation. The Unidrive M700 brings onboard real-time Ethernet, comprehensive position feedback and high performance control of dynamic permanent magnet servo motors to the range. It also provides a fully compatible upgrade for existing Unidrive SP users within Manufacturing Automation.

For more information on the full Unidrive M family, please download the Unidrive M Overview brochure or the 'Discover Unidrive M' App (available on the App Store, Android and online) via [www.UnidriveM.com](http://www.UnidriveM.com).



# Unidrive M700 features

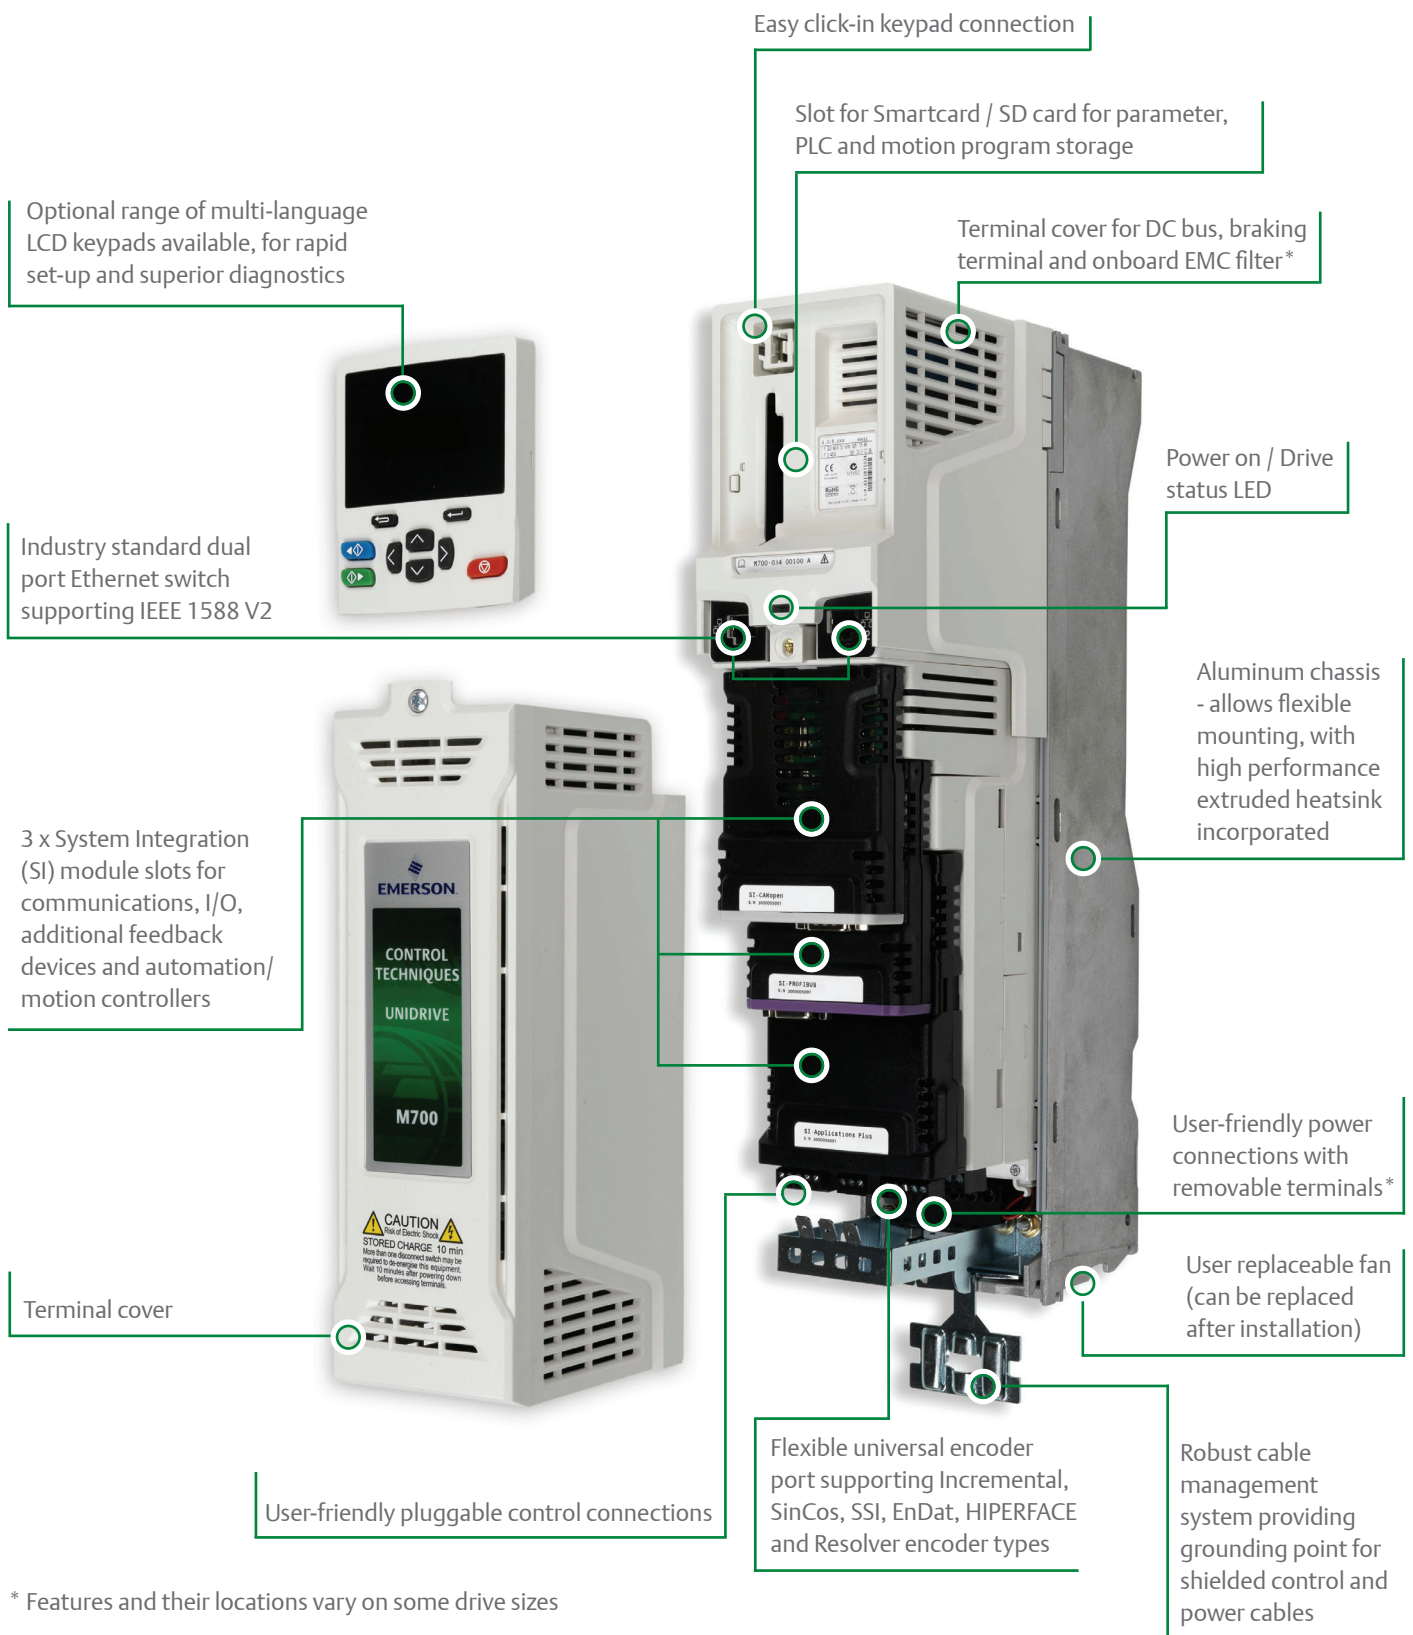

\* Features and their locations vary on some drive sizes

# Unidrive M700 AC and Servo drive

**Class leading induction and servo permanent magnet motor performance, with real-time Ethernet**

M700 delivers maximum machine throughput through precision motor control, onboard real-time Ethernet (IEEE 1588 V2 Precision Time Protocol), advanced motion control and high speed I/O for position capture, enabling machine builders to easily create more sophisticated and flexible machines.



## Unidrive M700 Highlights

### Maximum machine throughput with your choice of motor

Unidrive M maximizes machine throughput with exceptional control performance with virtually any industrial motor type:

- AC Induction Motors
- Permanent Magnet Motors
- Servo Motors
- Synchronous Reluctance Motors
- Linear Motors



Highly efficient permanent magnet motors from Leroy Somer

### Maximum choice and performance with the right encoder technology

Unidrive M700 allows you to choose the right encoder technology, based on performance and cost for your application. The onboard feedback interface provides high performance connectivity to multiple encoder channels and supports virtually any standard encoder feedback technology, including Resolver, BISS and EnDat devices.

Unimotor hd high dynamic brushless AC servo motor range





### Choice and performance with open technologies

Unidrive M Intelligent Machine Architecture adopts high performance, open technologies, for Ethernet networking and Machine Control programming, giving machine builders access to the widest pool of engineering talent and choice of automation components.

### Easy to access machine control features


Software tools, keypads and memory storage devices provide easy and fast access to Unidrive M's machine control features for configuration, monitoring and diagnostics.

### Add the extra features you need

Unidrive M700 supports up to three optional click-in System Integration (SI) modules that allow seamless integration with Manufacturing Automation systems and other vendor supplied equipment. Functions available include communications, additional I/O, feedback devices, enhanced safety features and scalable motion control.



## Intelligent Machine Architecture – Open technology, exceptional performance

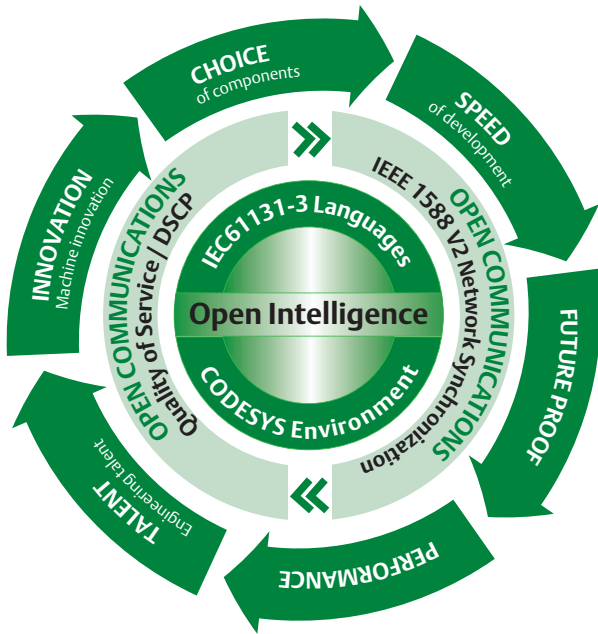

Control Techniques Intelligent Machine Architecture is an open approach to automation, designed to maximize machine throughput. This is achieved through a synchronized high performance network of intelligent control devices, sensors and actuators, linked together through open and globally available, industry standard Ethernet. Open standards provide significant benefits to machine builders and OEMs:

- Choice to select the ‘best-in-class’ for every machine component
- Familiarity with standards accelerates machine development and innovation
- Broad acceptance of open standards makes it easier to recruit skilled engineering staff with the required expertise

### How is Intelligent Machine Architecture different?

- Standard networking hardware - no limits on integration possibilities
- Performance without effort - ease of use is prioritized with high level software tools that are proven to speed up machine development and maximize machine performance
- Increased network efficiency - intelligence is networked and not centralized, removing traffic bottlenecks
- Inclusive networking - support for PROFINET, EtherNet/IP and Modbus TCP/IP allows interaction with the widest range of automation equipment from a global pool of automation providers
- Only leading technologies - Intelligent Machine Architecture is based on feedback from customers and adopts only the leading open standards throughout


### IEC 61131-3 motion and automation programming

Unidrive M offers the choice to integrate machine control functionality within the drive:

- Simple onboard CODESYS based PLC
- Advanced 1.5 axis Motion Controller, key features include:
  - ⇒ 250  $\mu$ s cycle time
  - ⇒ Motion profile generator
  - ⇒ Electronic gearbox
  - ⇒ Interpolated CAM
  - ⇒ Homing function
  - ⇒ High speed position freeze
- High performance MCI200 and MCI210 Machine Control modules for extra control performance



Unidrive M700's onboard real-time Ethernet (using IEEE 1588 V2) provides improved machine control with fast and flexible communications. Synchronization can be achieved across the network below 1  $\mu$ s, with update rates as low as 250  $\mu$ s with a virtually unlimited node count.

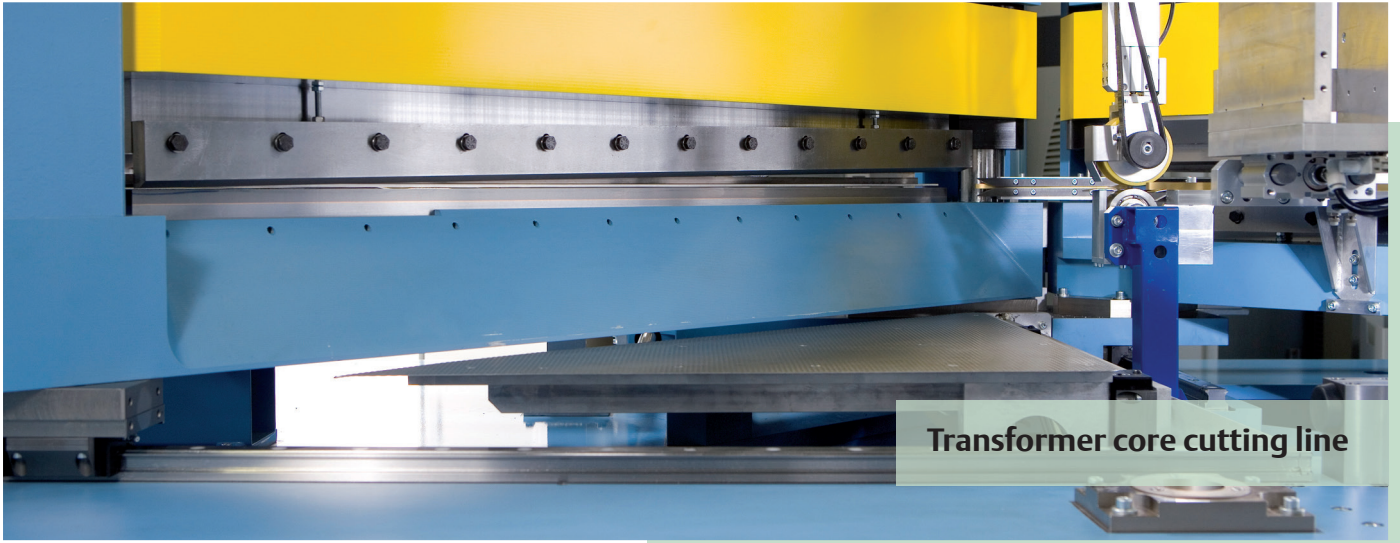

Transformer core cutting line

## Machine Control Studio Software - Powered by CODESYS

Control Techniques Machine Control Studio provides a flexible and intuitive environment for programming Unidrive M's new automation and motion control features. The new software offers programming for:



- Unidrive M700's onboard PLC
- High performance MCI200 and MCI210 Machine Control modules
- Ethernet network data configurations

Machine Control Studio is powered by CODESYS, the leading open software for programmable machine control. The programming environment is fully IEC 61131-3 compliant, meaning that it is familiar and therefore fast and easy to use for control engineers around the world.

The following IEC 61131-3 programming languages are supported:



- Structured Text (ST)
- Function Block Diagram (FBD)
- Structured Function Chart (SFC)
- Ladder Diagram (LD)
- Instruction List (IL)

Also supported:


- Continuous Function Chart (CFC)

Intuitive IntelliSense functionality helps to write consistent and robust programming, speeding up software development. Programmers have access to a vibrant open-source community for function blocks. Control Techniques also provides support for customers' own function block libraries, with on-line monitoring of program variables with user defined watch windows and help

Features	Unidrive M onboard	MCI module
Breakpoints	No	Yes
Source code upload/download	No	Yes
Online change	No	Yes
Trigonometric functions	No	Yes
64 bit data types	No	Yes
Real-time task(s)	Yes (min 4ms)	Yes (min 125 $\mu$ s)
Customizable drive menu	Yes (menu 30)	Yes (Menu 27, 28, 29)
Variable tracing	No	Yes
Tasks available	1 x Freewheeling task, 1 x Clock task	1 x Freewheeling task, 1 x Position task, 1 x Initial task, 4 x Clock tasks, 1 x Error task, 4 x Event tasks

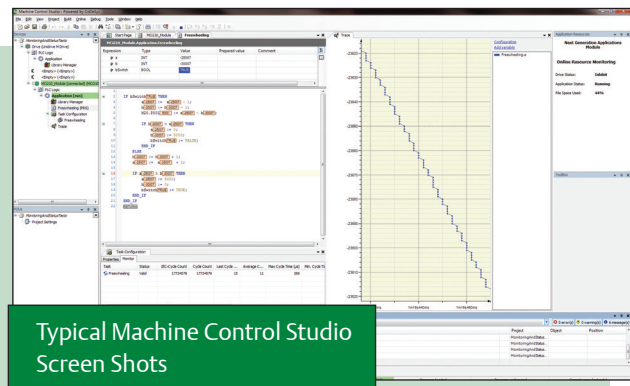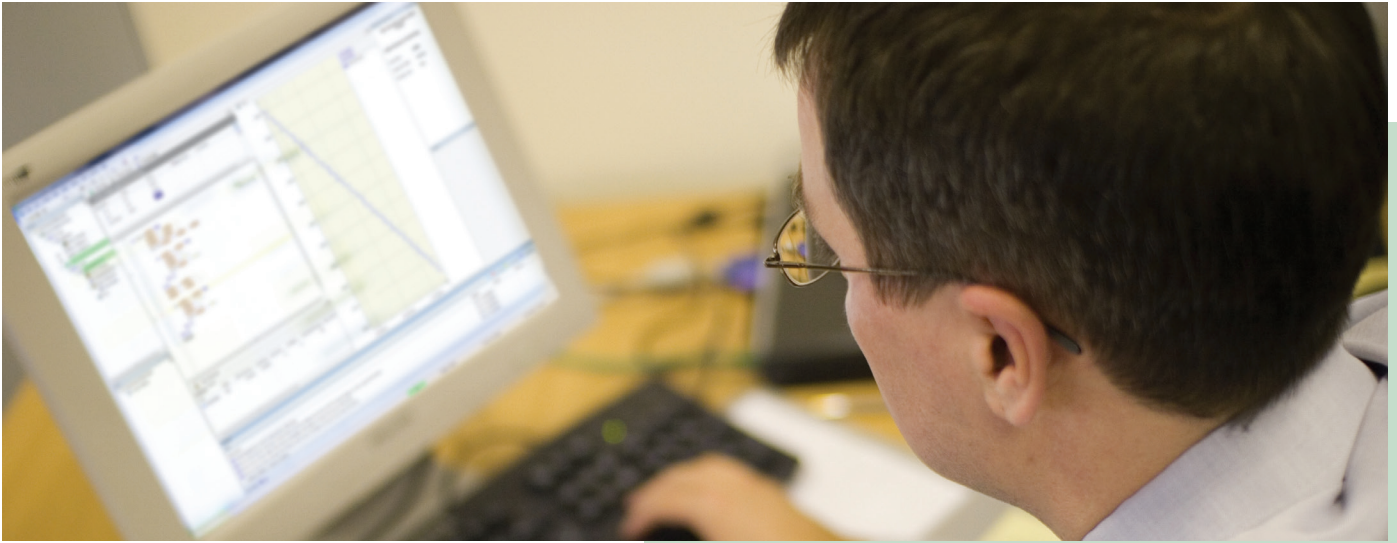

Typical Machine Control Studio Screen Shots

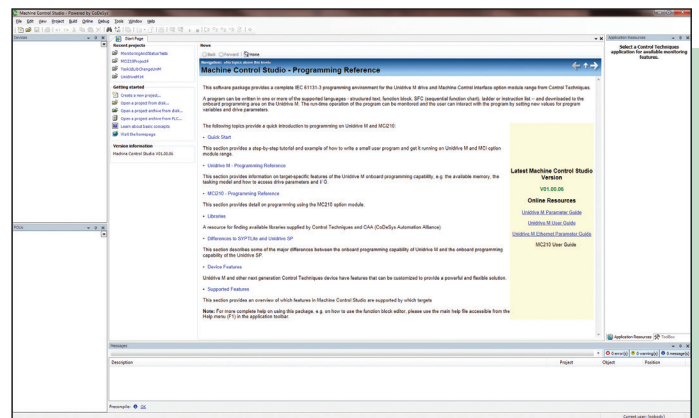

for on-line change of program, in line with current PLC practice.

## Open, Efficient, Synchronized Ethernet


Control Techniques Intelligent Machine Architecture uses standard Ethernet to connect the machine controller parts and other devices such as PCs, I/O and HMI's together. Ethernet provides machine builders and manufacturers with real benefits:

- Maximize machine productivity through high performance deterministic Ethernet, suitable for complete Machine Automation and demanding synchronized motion functions.
- Access future developments in IT based industries where billions of nodes are installed, future proofing your investments.
- Access to a massive choice of network monitoring and

diagnostics tools.

Through advances in Ethernet technology, standard Ethernet hardware now delivers the highest levels of machine performance in industrial networking. For communication between drives, PCs, I/O and other devices, Unidrive M uses open protocols such as TCP/IP and UDP, delivering exceptional performance:

- Network synchronization of less than 1  $\mu$ s (typically <200 ns)
- 250 $\mu$ s cycle time for the most demanding motion applications
- Virtually unlimited node count
- Bandwidth protection through a network gateway that manages non-real-time Ethernet messages
- Master/follower and peer-to-peer communications capabilities

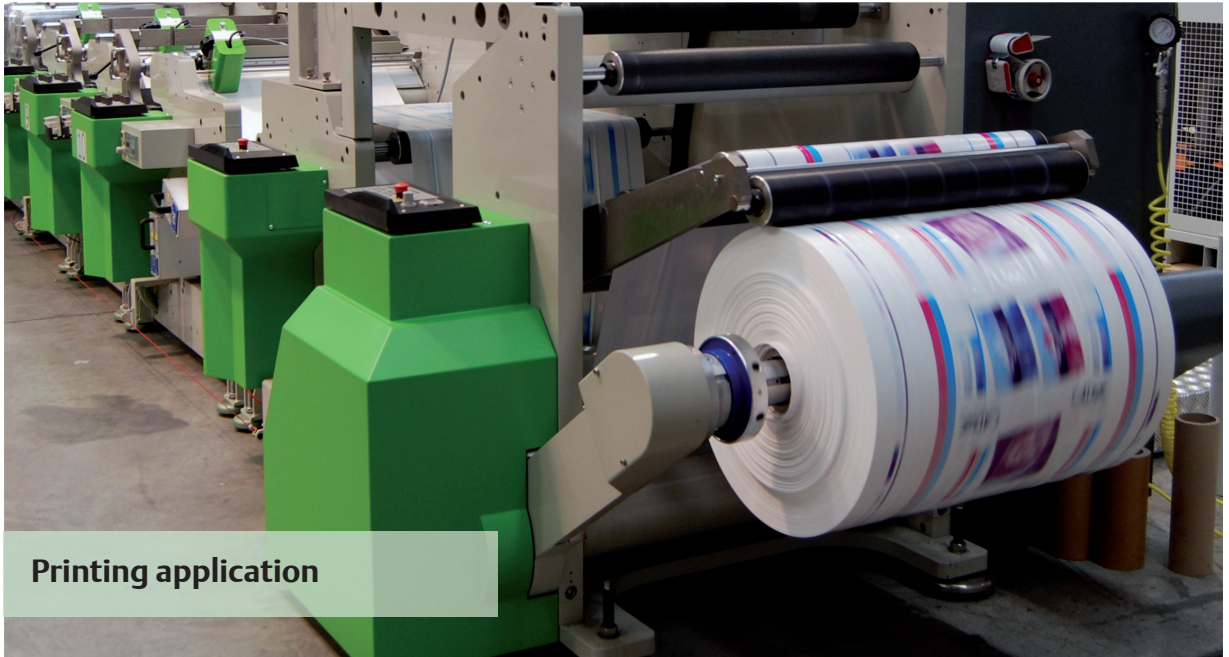

Printing application

## Network synchronization

Network synchronization is a common requirement across many industries including industrial automation, entertainment, telecommunications and power generation. This requirement led to the development of the Precision Time Protocol (PTP) standard which provides a mechanism for precisely synchronizing clocks across all PTP capable nodes in an Ethernet network. PTP is defined by the international standard IEEE 1588 V2.

The wide range of applications for PTP has driven demand for chip manufacturers to provide network controllers that economically support this protocol. This has led to a massive and increasing choice of networking products that cost-effectively integrate PTP, including industrial Ethernet switches and I/O. Unidrive M integrates PTP onboard the drive within a dual port Ethernet switch enabling high precision synchronization across the Ethernet network.


### IEEE 1588 V2 clock explanation

IEEE 1588 V2 distributed clocks are used to automatically synchronize the position, speed and current loops across all drives.


## Traffic management

### Manage non-critical network traffic through a network gateway

Unidrive M integrates a network gateway feature within the drive's dual port switch. This uses standards called Differentiated Services Code Point (DSCP) and Quality of Service (QoS) to protect network bandwidth by eliminating or delaying noncritical messages from outside the control network.

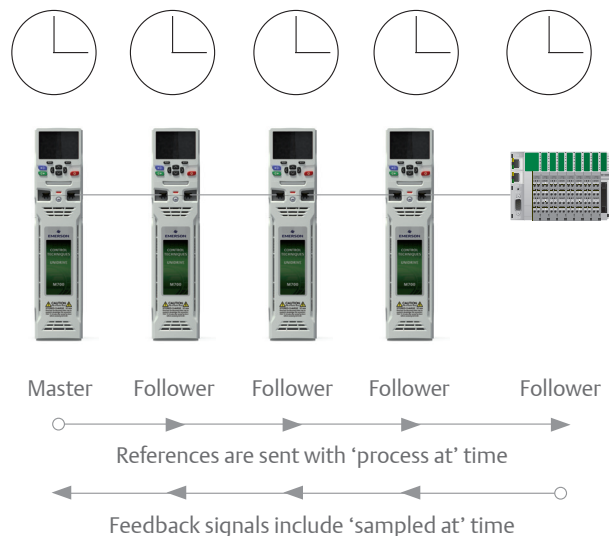

# Unidrive M Flexible Ethernet Communications

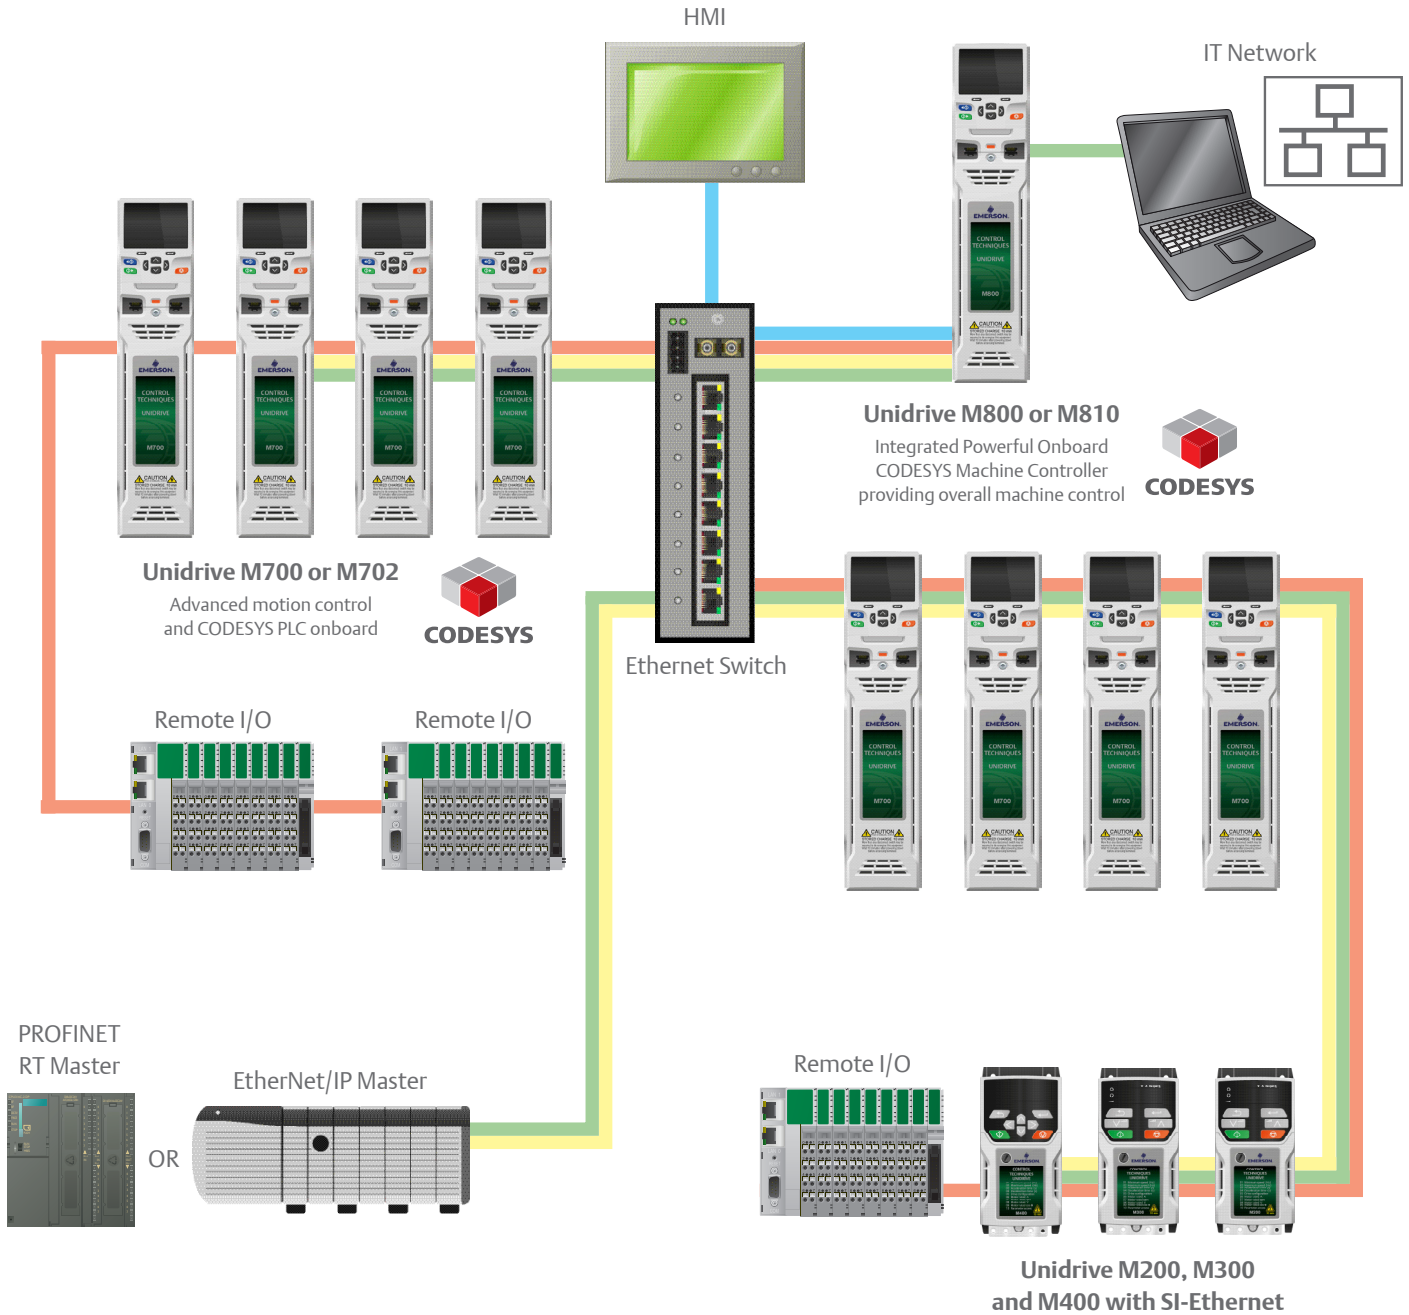

- Synchronized communications using IEEE 1588 V2 PTP
- PROFINET RT\* or EtherNet/IP communications
- Modbus TCP/IP communications
- IT communications - Managed using QoS to ensure network reliability

System Integration (SI) option modules allow additional connectivity with EtherCAT, PROFIBUS, DeviceNet CANopen and I/O. Plus connectivity to legacy CNet system



\* Future availability

## Control Mode


1. Open loop vector or V/Hz induction motor control
2. Open loop Rotor Flux Control for induction motors (RFC-A)




Closed loop permanent magnet motor control (RFC-S)



Open loop permanent magnet motor control (RFC-S)



Closed loop Rotor Flux Control for induction motors (RFC-A)



Active Front End (AFE)  
power quality converter



## Optional Drive Programming and Operator Interface

Unidrive M Connect



KI-Keypad



KI-Keypad RTC



Remote Keypad



Operator Interface



Smartcard




SD Card using SD-Smartcard  
Adaptor



## Centralized PLC /Motion Control

Motion Controller



PLC



Industrial Computer



## Optional Input/Output

Remote I/O



SI-I/O



4 x Digital I/O  
3 x Analog input (default) /  
Digital input  
1 x Analog output (default)  
/ Digital input  
2 x Relay

Standard




5 x Analog I/O  
8 x Digital I/O  
(including 2 x high  
speed I/O [250 μs])  
1 x Relay output  
1 x STO




### Applications with PLC or Motion Functionality

**Standard**


Easy to use onboard PLC and advanced motion control using industry standard CODESYS programming environment




SI-Applications Plus compatible module which allows existing SyPTPro application programs to be re-compiled for M700



MCI200 Advanced machine control using industry standard CODESYS programming environment




MCI210 Extended advanced machine control using industry standard CODESYS programming environment with simultaneous connectivity to 2 separate Ethernet networks




### Communications

**Standard**


Ethernet (IEEE 1588 V2)  
PROFINET RT\*  
Modbus TCP/IP  
EtherNet/IP  
TCP/IP  
UDP




SI-EtherCAT\*




SI-PROFIBUS




SI-Ethernet




SI-DeviceNet



SI-CANopen




SI-PROFINET



### Feedback


**Safety**

SI-Safety\*




**Standard**


2 x universal encoder input channels  
Support includes BISS C, EnDat 2.2, HIPERFACE and SSI  
1 x simulated encoder output



SI-Encoder




SI-Universal Encoder\*




### DC back-up power supply

24 - 1067 Vdc power



24 Vdc control



\*Future availability.



## Enhanced Machine Integration

### Scalable Safety

Machine safety features enhance machine throughput while protecting people and assets, helping to meet SIL3 (Safety Integrity Level 3). The M700 offers alternative levels of integrated safety functions to suit various manufacturing needs, reducing external components and machine costs.

- Safe Torque Off (STO) inputs provide an easy entry level for safety integration.
- The SI-Safety module\* provides an intelligent programmable solution to meet the IEC 61800-5-2 functional safety standard, covering numerous functions including STO, Safe Stop 1 and 2, Safe Limited Speed and Safe Speed Monitor.

\* Future release


### Flexible universal encoder port

Increase flexibility and reduce system costs through simultaneously connecting up to three\*\* high performance encoder channels as standard. As an example, the drive can interface with a feedback encoder, reference encoder and provide

a simulated encoder output without the need for additional System Integration modules.

- Two universal encoder input channels
  - ◇ Support for standard incremental and SinCos encoders, including those with absolute commutation signals.
  - ◇ Support for communications based encoders with up to a 4 Mbaud rate and line compensation for long cable lengths of up to 100 m.
  - ◇ Support includes BiSS C, EnDat 2.2, HiPerFace and SSI
  - ◇ Resolver support for feedback in harsh environments.
- One simulated encoder output
  - ◇ Position reference for CAMs, digital lock and electronic gearbox applications.
  - ◇ Implemented through hardware to maximize performance.

\*\*The functionality is dependent upon the encoder types being used

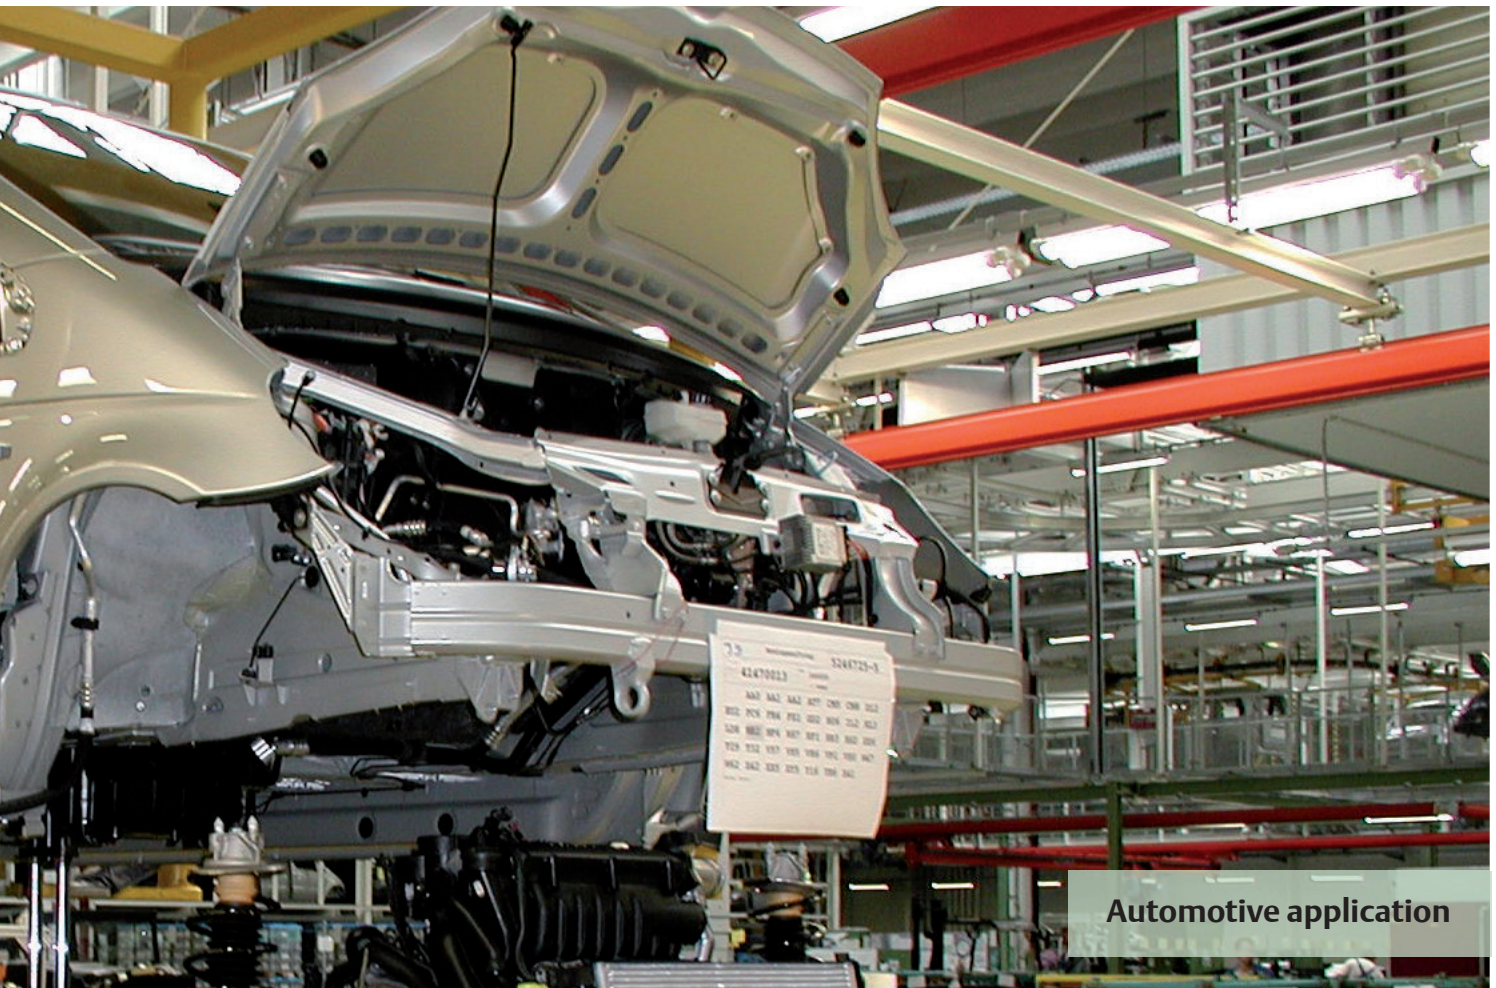

Automotive application

## Power System Flexibility

Unidrive M's power stage enhances flexibility and energy efficiency

- Easy common DC bus configuration enables braking energy to be recycled within the drive system, reducing energy usage and eliminating external supply components. This economic method also provides a minimum footprint for a multiple drives solution.
- Unidrive M can run with a wide operating DC voltage input, from 24 V up to maximum Volts, providing optimum choice of auxiliary power supply for back-up purposes.
- Low losses, up to 98% efficient.
- Low power standby mode. In some applications, drives can sit idle for significant periods; M700's reduced standby power saves energy.
- M700 supports sensorless (open loop) control of compact high efficiency permanent magnet motors.
- Active Front End to return braking energy to the power supply and minimize harmonic distortion.



Common DC bus configuration enables braking energy to be recycled within the drive system






**Test rig application**


## Fast and Easy access for Commissioning, Monitoring and Diagnostics

Unidrive M keypads, memory devices and software tools make it easy to access Unidrive M700's full feature set, allowing users to optimize drive tuning, back-up the configuration set and troubleshoot more quickly.

## User interface options

Unidrive M benefits from a number of optional keypad choices to meet your application needs.

Type		Benefit
KI-Keypad: Removable plain text LCD keypad		Plain text, multi-language LCD keypad for in depth parameter and data descriptions for an enhanced user experience. Can also be used for mounting on the side of the drive, using the appropriate tile mounting kit.
KI-Keypad RTC: Removable plain text LCD with real-time clock		All the features of the KI-Keypad, but with battery operated real-time clock. This allows accurate time stamping of events, aiding diagnostics.
Remote Keypad		Remote mountable, plain text, multi-language LCD keypad allows flexible mounting on the outside of a panel and meets IP66 (NEMA 4).

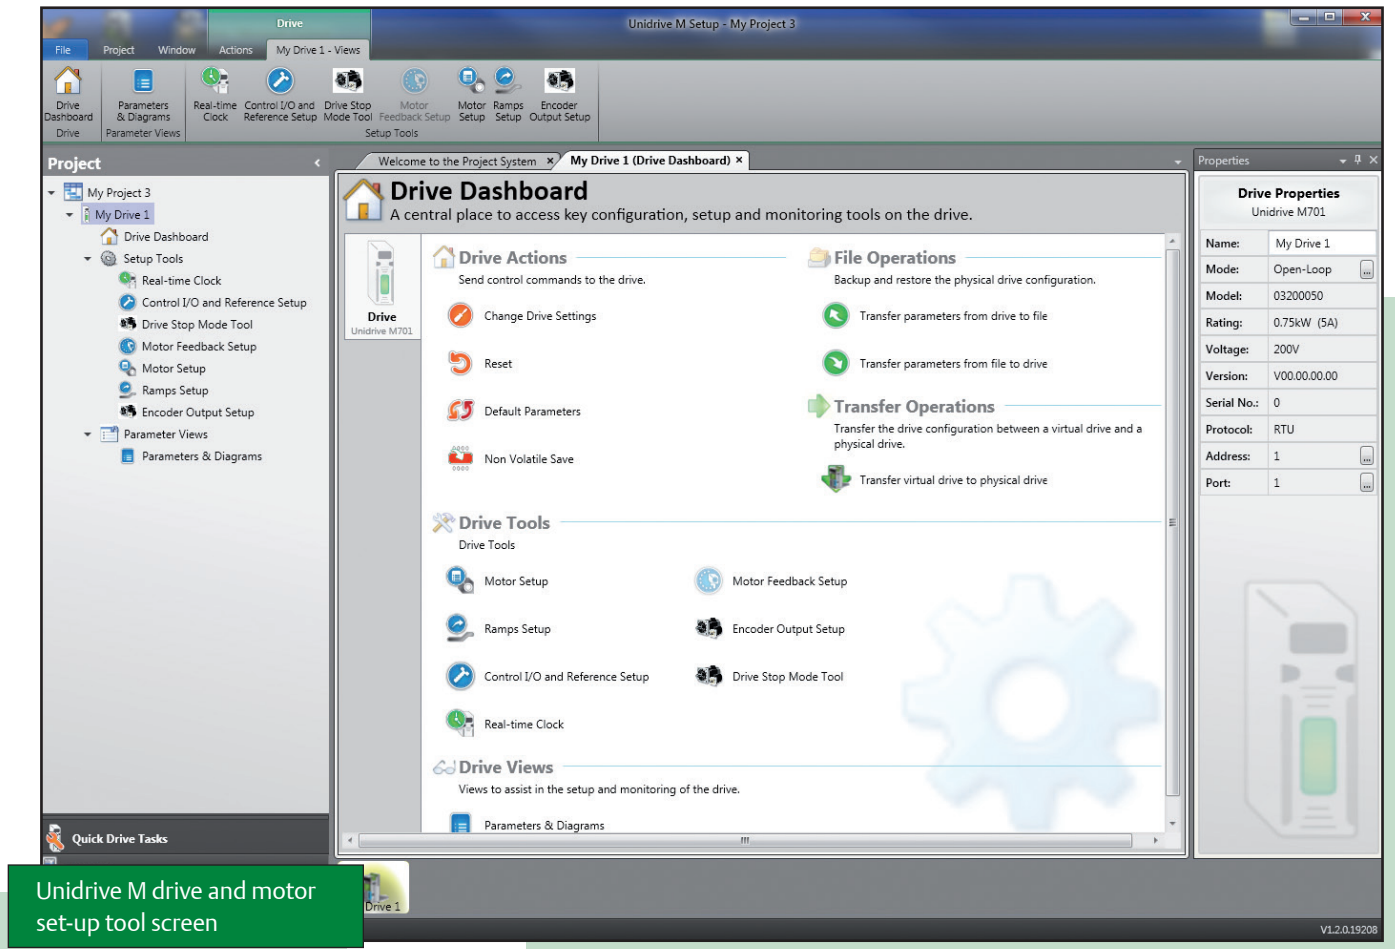

## Unidrive M Connect commissioning tool

Based on Control Techniques' 25 years of experience, Unidrive M Connect is our latest drive configuration tool for commissioning, optimizing and monitoring drive/system performance. Its development draws from extensive user research, using human centered design principals to give the ultimate user experience:

- Fast task based commissioning and easy maintenance of the Unidrive M family is simplified via familiar Windows interface
- Intuitive graphical tools enhance and simplify user experience
- For experienced users, dynamic drive logic diagrams and enhanced searchable listings are present
- Drive and motor performance can be optimized with minimal specialized drive knowledge
- Tool is scalable to match application requirements
- Supports the import of Unidrive SP parameter files and allows full drive cloning (i.e. parameter sets and application program)
- Multiple simultaneous communications channels for a more complete overview of the system

- Drive discovery gives the ability to find drives on a network automatically without the user having to specify their addresses
- Automatic RTU baud rate scanning on the M701 485 connection

## Unidrive M's portable memory devices Smartcard

The optional Smartcard memory device can be used to back-up parameter sets and basic PLC programs, as well as copying them from one drive to another. It also allows:

- Simplified drive maintenance and commissioning
- Quick set-up for sequential build of machines
- Machine upgrades to be stored on a Smartcard and sent to the customer for installation

## SD card

Unidrive M700 uses popular SD cards for quick and easy parameter and program storage using an adaptor, allowing them to fit in the drive Smartcard slot. SD cards provide a huge memory capability allowing a complete system reload if required, and can be easily pre-programmed on a common PC.



**Laser cutting application**

## Select the M700 feature-set for your application

To maximize customer choice, the M700 offers the following 3 variants:

### M700 - Ethernet

Onboard real-time Ethernet is included on the standard M700, with 1 x Safe Torque Off (STO) and both analog and digital I/O, making it an incredibly versatile high performance AC drive.

### M701 - Unidrive SP replacement

Designed to match Control Techniques' highly popular Unidrive SP feature-set. This includes RS485 communications, 1 x STO, analog and digital I/O, identical control connectors, with Unidrive SP Smartcard parameter sets supported to make upgrading to Unidrive M as simple as possible.

### M702 - Safety Enhanced

The safety enhanced M702 has 2 x STO, onboard real-time Ethernet and digital I/O; where easy integration with modern control and safety systems is paramount.

## Powerful and easy field service and upgrade

The M700 is designed to extend the field service life of previous generations of products. It also provides the easiest possible upgrade for OEM machine designs that currently use Unidrive SP drives.

- M701 provides a direct upgrade path from Unidrive SP:
  - ⇒ RS485 communications
  - ⇒ 1 x STO terminal
  - ⇒ Analog and digital I/O

- Unidrive M700 and M701 are able to take a Smartcard (parameter copying device) from Unidrive SP and import drive settings.
- Unidrive M700 and M701 have the same control connector terminal layout as Unidrive SP.
- The SI-Applications Plus module allows existing Unidrive SP SyPTPro programs to be easily recompiled for Unidrive M700.
- Unidrive M700 has more compact dimensions than Unidrive SP. However, easy retrofit is ensured as fixing points for existing Unidrive SP installations can be used either with standard Unidrive M mounting brackets or optional conversion kits where required.

## Performance control for every motor

Control Techniques' unique motor control algorithms combined with the latest microprocessor technology ensure that Unidrive M drives offer the highest stability and bandwidth for all industrial motor types. This enables you to maximize machine throughput in every application and with every motor, from standard AC induction motors to dynamic linear motors and from energy saving permanent magnet motors to high performance servo motors.

- Unidrive M700 can compensate for mechanical load resonance in motors, ensuring optimal performance.
- High bandwidth motor control algorithm for open and closed loop induction, synchronous reluctance and PM servo motors with up to 3,300 Hz current loop bandwidth and 250 Hz speed loop bandwidth.

Motor control options available include:

Control Mode	Control Strategy	Features
Open loop vector or V/Hz induction motor control	Frequency Speed	Open loop motor control for induction motors, providing the easiest configuration. V/Hz can be used in multi-motor systems.
<b>Enhanced</b> open loop Rotor Flux Control for induction motors (RFC-A)	Speed Torque	Vector algorithm utilizing closed loop current control to greatly enhance performance for all induction motor sizes.
<b>New</b> open loop permanent magnet motor control (RFC-S)	Speed Torque Position	Open loop motor control for permanent magnet motors utilizing closed loop current control. This mode offers good dynamic performance and enables more compact and higher efficiency motor technologies to be used.  This mode also supports simple positioning without the need for encoder position feedback.
<b>Enhanced</b> closed loop Rotor Flux Control for induction motors (RFC-A)	Speed Torque Position	Dynamic speed or position control of induction motors, supporting a wide range of feedback devices.
<b>Enhanced</b> closed loop permanent magnet/servo motor control (RFC-S)	Speed Torque Position	Closed loop control of high efficiency and servo permanent magnet motors supporting a wide range of feedback devices. This mode also supports the control of Synchronous Reluctance Motors.
<b>Enhanced</b> Active Front End (AFE) Power Quality Converter	Regenerative	Active Front End (AFE) to return excess braking energy back onto the power line, reducing energy costs instead of dissipating this energy as heat. The AFE provides power factor control for power quality management and greatly reduces unwanted power harmonics.

### Unidrive M700 feature and specification table

Performance	Current loop update: 62 $\mu$ s	Feedback	2 x Encoder input and 1 x Simulated encoder output	
	Heavy Duty peak rating: 200 % (3s)		Onboard I/O	3 x Analog input, 2 x Analog output, 4 x Digital input, 1 x Digital output, 3 x Bidirectional digital input or output
	Maximum output frequency: 550 Hz			(M702: 3 x Digital input, 3 x Digital output and no Analog I/O)
	Switching frequency range: 2, 3, 4, 6, 8, 12, 16 kHz (3 kHz default)			1 x Relay output
	High performance current controllers			Machine safety
Onboard intelligence	Programmable Logic Control (PLC)	Power and motor control	Stationary autotune for permanent magnet motors	
	Real-time tasks		Mechanical load resonance compensation	
	Digital lock control		Wide operating range back-up DC supply	
	Advanced Motion Controller		24 V control back-up	
Onboard comms	Ethernet (2 switched ports), (M701: RS485)	Other	Temperature controlled fan operation with user adjustable speed limit	
Mechanical attributes	Tile mounting on sizes 3, 4, 5		User replaceable fan(s)	
	Unidrive SP compatible mechanical footprint either as standard or with conversion plates		Conformal coating	
	Common DC bus connections on sizes 3, 4, 5, 6		Standby mode (energy saving)	
Parameter back-up	Ethernet/serial port cloning			
	SD card (using SD-Smartcard adaptor)			
	Smartcard reader support			
	Electronic motor nameplate parameter storage (EnDat, HIPERFACE, BISS encoders)			

# Unidrive M700 ratings and specifications


200/240 Vac ±10%						
Drive	Heavy Duty			Normal Duty		
	Max Continuous Current (A)	Motor Shaft Power (kW)	Motor Shaft Power (HP)	Max Continuous Current (A)	Motor Shaft Power (kW)	Motor Shaft Power (HP)
M70x-032 00050 A	5	0.75	1	6.6	1.1	1.5
M70x-032 00066 A	6.6	1.1	1.5	8	1.5	2
M70x-032 00080 A	8	1.5	2	11	2.2	3
M70x-032 00106 A	10.6	2.2	3	12.7	3	3
M70x-042 00137 A	13.7	3	3	18	4	5
M70x-042 00185 A	18.5	4	5	24	5.5	7.5
M70x-052 00250 A	25	5.5	7.5	30	7.5	10
M70x-062 00330 A	33	7.5	10	50	11	15
M70x-062 00440 A	44	11	15	58	15	20
M70x-072 00610 A	61	15	20	75	18.5	25
M70x-072 00750 A	75	18.5	25	94	22	30
M70x-072 00830 A	83	22	30	117	30	40
M70x-082 01160 A	116	30	40	149	37	50
M70x-082 01320 A	132	37	50	180	45	60
M70x-092 01760 A	176	45	60	216	55	75
M70x-092 02190 A	219	55	75	266	75	100
M70x-102 01760 A	176	45	60	216	55	75
M70x-102 02190 A	219	55	75	266	75	100
M70x-102 02830 A	283	75	100	325	90	125
M70x-102 03000 A	300	90	125	360	110	150

380/480 Vac ±10%						
Drive	Heavy Duty			Normal Duty		
	Max Continuous Current (A)	Motor Shaft Power (kW)	Motor Shaft Power (HP)	Max Continuous Current (A)	Motor Shaft Power (kW)	Motor Shaft Power (HP)
M70x-034 00025 A	2.5	0.75	1	3.4	1.1	1.5
M70x-034 00031 A	3.1	1.1	1.5	4.5	1.5	2
M70x-034 00045 A	4.5	1.5	2	6.2	2.2	3
M70x-034 00062 A	6.2	2.2	3	7.7	3	5
M70x-034 00078 A	7.8	3	5	10.4	4	5
M70x-034 00100 A	10	4	5	12.3	5.5	7.5
M70x-044 00150 A	15	5.5	10	18.5	7.5	10
M70x-044 00172 A	17.2	7.5	10	24	11	15
M70x-054 00270 A	27	11	20	30	15	20
M70x-054 00300 A	30	15	20	30	15	20
M70x-064 00350 A	35	15	25	38	18.5	25
M70x-064 00420 A	42	18.5	30	48	22	30
M70x-064 00470 A	47	22	30	63	30	40
M70x-074 00660 A	66	30	50	79	37	50
M70x-074 00770 A	77	37	60	94	45	60
M70x-074 01000 A	100	45	75	112	55	75
M70x-084 01340 A	134	55	100	155	75	100
M70x-084 01570 A	157	75	125	184	90	125
M70x-094 02000 A	200	90	150	221	110	150
M70x-094 02240 A	224	110	150	266	132	200
M70x-104 02000 A	200	90	150	221	110	150
M70x-104 02240 A	224	110	150	266	132	200
M70x-104 02700 A	270	132	200	320	160	250
M70x-104 03200 A	320	160	250	361	200	300
M70x-114 03770 A	377	185	300	437	225	300
M70x-114 04170 A	417	200	300	487	250	400
M70x-114 04800 A	480	250	400	585	315	450

500/575 Vac ±10%						
Drive	Heavy Duty			Normal Duty		
	Max Continuous Current (A)	Motor Shaft Power (kW)	Motor Shaft Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
M70x-055 00030 A	3	1.5	2	3.9	2.2	3
M70x-055 00040 A	4	2.2	3	6.1	4	5
M70x-055 00069 A	6.9	4	5	10	5.5	7.5
M70x-065 00100 A	10	5.5	7.5	12	7.5	10
M70x-065 00150 A	15	7.5	10	17	11	15
M70x-065 00190 A	19	11	15	22	15	20
M70x-065 00230 A	23	15	20	27	18.5	25
M70x-065 00290 A	29	18.5	25	34	22	30
M70x-065 00350 A	35	22	30	43	30	40
M70x-075 00440 A	44	30	40	53	45	50
M70x-075 00550 A	55	37	50	73	55	60
M70x-085 00630 A	63	45	60	86	75	75
M70x-085 00860 A	86	55	75	108	90	100
M70x-095 01040 A	104	75	100	125	110	125
M70x-095 01310 A	131	90	125	150	110	150
M70x-105 01040 A	104	75	100	125	110	125
M70x-105 01310 A	131	90	125	150	110	150
M70x-105 01520 A	152	110	150	200	130	200
M70x-105 01900 A	190	132	200	200	150	200
M70x-115 02000 A	200	150	200	248	175	250
M70x-115 02540 A	254	185	250	288	225	300
M70x-115 03020 A	302	225	300	339	250	350

500/690 Vac ±10%						
Drive	Heavy Duty			Normal Duty		
	Max Continuous Current (A)	Motor Shaft Power (kW)	Motor Shaft Power (HP)	Max Continuous Current (A)	Typical Output (kW)	Motor Power (HP)
M70x-076 00190 A	19	15	20	23	18.5	25
M70x-076 00240 A	24	18.5	25	30	22	30
M70x-076 00290 A	29	22	30	36	30	40
M70x-076 00380 A	38	30	40	46	37	50
M70x-076 00440 A	44	37	50	52	45	60
M70x-076 00540 A	54	45	60	73	55	75
M70x-086 00630 A	63	55	75	86	75	100
M70x-086 00860 A	86	75	100	108	90	125
M70x-096 01040 A	104	90	125	125	110	150
M70x-096 01310 A	131	110	150	150	132	175
M70x-106 01040 A	104	90	125	125	110	150
M70x-106 01310 A	131	110	150	155	132	175
M70x-106 01500 A	150	132	175	172	160	200
M70x-106 01780 A	178	160	200	197	185	250
M70x-116 02100 A	210	185	250	225	200	250
M70x-116 02380 A	238	200	250	275	250	300
M70x-116 02770 A	277	250	300	325	315	400

**Key:**

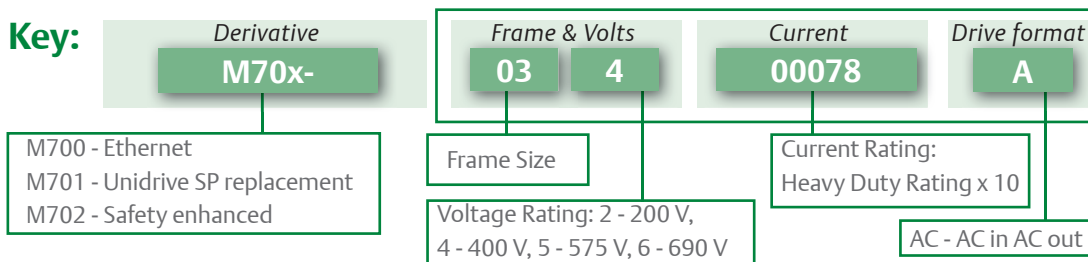

Information on higher powers will appear in subsequent issues of this brochure. See overleaf for Normal Duty and Heavy Duty definitions.

# Unidrive M700 ratings and specifications

## Heavy Duty

Suitable for demanding applications, current overload of 200% is available for dynamic loads.

## Normal Duty

Suitable for most applications, with a current overload capacity of 110%.

## Environmental safety and electrical conformance

- IP20 / NEMA1 / UL TYPE 1\*  
\*UL open class as standard, additional kit needed to achieve Type 1
- IP65 / NEMA4 / UL TYPE 12 rating is achieved on the rear of the drive when through panel mounted
- Ambient temperature -20 °C to 40 °C as standard. Up to 55 °C with derating
- Humidity 95 % maximum (non-condensing) at 40 °C
- Altitude: 0 to 3000m, derate 1 % per 100 m between 1000 m and 3000 m
- Random Vibration: Tested in accordance with IEC 60068-2-64
- Mechanical Shock Tested in accordance with IEC 60068-2-29
- Storage temperature -40 °C to 70 °C
- Electromagnetic Immunity complies with EN 61800-3 and EN 61000-6-2
- With onboard EMC filter, complies with EN 61800-3 (2nd environment)
- EN 61000-6-3 and EN 61000-6-4 with optional footprint EMC filter
- IEC 60146-1-1 Supply conditions
- IEC 61800-5-1 (Electrical Safety)

- IEC 61131-2 I/O
- Safe Torque Off, independently assessed by TÜV to IEC 61800-5-2 SIL 3 and EN ISO 13849-1 PL
- UL 508C (Electrical Safety)

## Optional media and accessories

Description	Order code
SD-Smartcard Adaptor	
Smartcard (64 kB)	2214-0010

## Internal brake resistor

Frame size	Order code
3	1220-2752
4 & 5	1299-0003

## DC bus paralleling kit

Frame size	Order code
3	3470-0048
4	3470-0061
5	3470-0068
6	3470-0063

## Through hole IP65 kit

Frame size	Order code
3	3470-0053
4	3470-0056
5	3470-0067
6	3470-0055
7	3470-0079
8	3470-0083

## Dimensions and Weight



Frame Size		3	4	5	6	7
Dimensions (H x W x D)	mm	379 x 83 x 200	379 x 123.5 x 200	379x 141x 200	379 x 210 x 227	548 x 270 x 280
	in	14.9 x 3.3 x 7.9	14.9 x 4.9 x 7.9	14.9 x 5.6 x 7.9	14.9 x 8.3 x 8.9	21.6 x 10.6 x 11.0
Weight	kg (lb)	4.5 (9.9)	6.5 (14.3)	7.4 (16.3)	14 (30.9)	45 (99.2)

## Tile mount kit

Frame size	Order code
3	3470-0049
4	3470-0060
5	3470-0073

## UL Type 1 Conduit kit

Frame size	Order code
3 & 4	6521-0071
5	3470-0069
6	3470-0059
7	3470-0080
8	3470-0088

## Retrofit brackets

To allow Unidrive M drives to be fitted in existing Unidrive SP surface mount installations.

Frame size	Order code
4	3470-0062
5	3470-0066
6	3470-0074
7	3470-0078
8	3470-0087

## Cable grommet kit

Frame size	Order code
7	3470-0086
8 - Single cable	3470-0089
8 - Dual cable	3470-0090

## General kit items

Item	Order code
Keypad blanking cover (10 pieces in pack)	3470-0058
Frame size 3 & 4 power connector split kit	3470-0064
Frame 3 through hole multi-axis kit **	3470-0065

\*\* To allow multiple drives to be through hole mounted with no space between them.

## Optional external EMC filters

Unidrive M built-in EMC filter complies with EN 61800-3. External EMC filters are required for compliance with EN 61000-6-4.

Frame size	Voltage	Order code
3	200 V	4200-3230
	400 V	4200-3480
4	200 V	4200-0272
	400 V	4200-0252
5	200 V	4200-0312
	400 V	4200-0402
	575 V	4200-0122
6	200 V	4200-2300
	400 V	4200-4800
	575 V	4200-3690
7	200 V & 400V	4200-6406
	575 V	4200-6408

For a full list of patents and patent applications, visit [www.controltechniques.com/patents](http://www.controltechniques.com/patents).



	8	9*	10	10	11*	11*
	785 x 310 x 290	940 x 310 x 290	1054 x 310 x 290	Rectifier 400 x 310 x 290	1410 x 310 x 310	Rectifier 570 x 310 x 310
				Inverter 730 x 310 x 290		Inverter 880 x 310 x 310
	30.9 x 12.2 x 11.4	37.0 x 12.2 x 11.4	41.5 x 12.2 x 11.4	Rectifier 15.8 x 12.2 x 11.4	55.5 x 12.2 x 12.2	Rectifier 22.4 x 12.2 x 12.2
				Inverter 28.7 x 12.2 x 11.4		Inverter 34.7 x 12.2 x 12.2
	50 (110.2)					

## CONTROL TECHNIQUES DRIVE & APPLICATION CENTERS

### AUSTRALIA

Melbourne Application Center  
T: +61 3 973 81777  
controltechniques.au@emerson.com

Sydney Drive Center  
T: +61 2 9838 7222  
controltechniques.au@emerson.com

### AUSTRIA

Linz Drive Center  
T: +43 7229 789480  
controltechniques.at@emerson.com

### BELGIUM

Brussels Drive Center  
T: +32 1574 0700  
controltechniques.be@emerson.com

### BRAZIL

Sorocaba Drive Center  
T: +55 15 3413 8169  
vendasbrasil.cta@emerson.com

### CANADA

Toronto Application Center  
T: +1 905 948 3402  
controltechniques.ca@emerson.com

Calgary Drive Center  
T: +1 403 253 8738  
controltechniques.ca@emerson.com

### CHILE

Santiago Application Center  
T: +56 9 7708 9470  
saleschile.cta@emerson.com

### CHINA

Shanghai Drive Center  
T: +86 21 3418 3888  
controltechniques.cn@emerson.com

Shenzhen Application Center  
T: +86 755 8618 7287  
controltechniques.cn@emerson.com

### CZECH REPUBLIC

Brno Drive Center  
T: +420 511 180111  
controltechniques.cz@emerson.com

### DENMARK

Copenhagen Drive Center  
T: +45 4369 6100  
controltechniques.dk@emerson.com

### FRANCE\*

Angoulême Drive Center  
T: +33 5 4564 5454  
controltechniques.fr@emerson.com

### GERMANY

Bonn Drive Center  
T: +49 2242 8770  
controltechniques.de@emerson.com

Chemnitz Drive Center  
T: +49 3722 52030  
controltechniques.de@emerson.com

Darmstadt Drive Center  
T: +49 6251 17700  
controltechniques.de@emerson.com

### GREECE\*

Athens Application Center  
T: +0030 210 57 86086/088  
controltechniques.gr@emerson.com

### HOLLAND

Rotterdam Drive Center  
T: +31 184 420555  
controltechniques.nl@emerson.com

### INDIA

Chennai Drive Center  
T: +91 44 2496 1123/1130/1083  
T: +91 44 6691 8400  
controltechniques.in@emerson.com

### IRELAND

Newbridge Drive Center  
T: +353 45 448200  
controltechniques.ie@emerson.com

### ITALY

Milan Drive Center  
T: +39 02575 751  
controltechniques.it@emerson.com

Vicenza Drive Center  
T: +39 0444 933400  
controltechniques.it@emerson.com

### MALAYSIA

Selangor Drive Center  
T: +603 5891 6099  
controltechniques.my@emerson.com

### MEXICO

Mexico City Application Center  
T: +52 155 3333 6666  
salesmexico.cta@emerson.com

### POLAND

Warsaw Application Center  
T: +48 22 45 89 200  
controltechniques.pl@emerson.com

### REPUBLIC OF SOUTH AFRICA

Johannesburg Drive Center  
T: +27 11 462 1740  
controltechniques.za@emerson.com

Cape Town Application Center  
T: +27 21 556 0245  
controltechniques.za@emerson.com

### RUSSIA

Moscow Application Center  
T: +7 495 981 9811  
controltechniques.ru@emerson.com

Chelyabinsk Application Center  
T: +7 351 799 5151  
controltechniques.ru@emerson.com

Saint Petersburg Application Center  
T: +7 812 448 2063  
controltechniques.ru@emerson.com

### SINGAPORE

Singapore Drive Center  
T: +65 6556 1100  
controltechniques.sg@emerson.com

### SLOVAKIA EMERSON A.S

T: +421 32 7700 369  
controltechniques.sk@emerson.com

### SOUTH KOREA

Seoul Application Center  
T: +82 2 3483 1605  
controltechniques.kr@emerson.com

### SPAIN

Barcelona Drive Center  
T: +34 93 680 1661  
controltechniques.es@emerson.com

Bilbao Drive Center  
T: +34 94 620 3646  
controltechniques.es@emerson.com

Madrid Application Centre  
T: +34 91 490 21 05  
controltechniques.es@emerson.com

Valencia Drive Center  
T: +34 96 154 2900  
controltechniques.es@emerson.com

### SWEDEN\*

Stockholm Application Center  
T: +468 554 241 00  
controltechniques.se@emerson.com

### SWITZERLAND

Zurich Drive Center  
T: +41 56 201 4242  
controltechniques.ch@emerson.com

Lausanne Application Center  
T: +41 21 637 7070  
controltechniques.fr.ch@emerson.com

### TAIWAN

Taipei Application Center  
T: +886 2 8161 7695  
controltechniques.tw@emerson.com

### THAILAND

Bangkok Drive Center  
T: +66 2 962 2099  
controltechniques.th@emerson.com

### TURKEY

Istanbul Drive Center  
T: +90 216 4182420  
controltechniques.tr@emerson.com

### UAE\*

Emerson FZE  
T: +971 4 8118100  
ct.dubai@emerson.com

### UKRAINE

Kiev Application Center  
T: +380 44 492 99 29  
controltechniques.ukr@emerson.com

### UNITED KINGDOM

Telford Drive Center  
T: +44 1952 213700  
controltechniques.uk@emerson.com

### USA

Charlotte Application Center  
T: +1 800 893 2321  
controltechniques.us@emerson.com

Cleveland Drive Center  
T: +1 216 901 2400  
controltechniques.us@emerson.com

Detroit Application Center  
T: +1 248 882 2652  
controltechniques.us@emerson.com

Minneapolis Drive Center  
Americas Headquarters  
T: +1 952 995 8000  
controltechniques.us@emerson.com

Portland Drive Center  
T: +1 503 266 2094  
controltechniques.us@emerson.com

Providence Application Center  
T: +1 401 392 4256  
controltechniques.us@emerson.com

### LATIN AMERICA

Miami Application Center  
T: +1 954 846 5082  
saleslatinam.cta@emerson.com



The Emerson logo is a trademark and a service mark of Emerson Electric Co. ©2013 Emerson Electric Co.

## DRIVING THE WORLD...

## CONTROL TECHNIQUES DISTRIBUTORS

### ARGENTINA

Euro Techniques SA  
T: +54 11 4331 7820  
eurotech@eurotechsa.com.ar

### BAHRAIN

Emerson FZE  
T: +971 4 8118100  
ct.bahrain@emerson.com

### BULGARIA

BLS - Automation Ltd  
T: +359 32 630 707  
info@blsaautomation.com

### COLOMBIA

Sistronic SAS  
T: +57 2 555 6000  
luis.alvarez@sistronic.com.co

Redes Electricas S.A.  
T: +57 1 364 7000  
alvaro.rodriguez@redeselectricas.com

Quimel Colombia S.A.  
T: +57 1 547 5215  
gerencia@quimelco.com

### CROATIA

Zigg-Pro d.o.o.  
T: +385 1 3463 000  
zigg-pro@zg.hinet.hr

### CYPRUS

Acme Industrial Electronic Services Ltd  
T: +3572 5 332181  
acme@cytanet.com.cy

### DOMINICAN REPUBLIC

Puradom S.A.  
T: +1 809 565 9599  
franco@puradom.com

### EGYPT

Samiram  
T: +202 29703868/  
+202 29703869  
samiramz@samiram.com

### EL SALVADOR

Servielectric Industrial S.A. de C.V.  
T: +503 2278 1280  
aeorellana@gruposervielectric.com

### ECUADOR

Veltek Cia. Ltda.  
T: +59 3 2326 4623  
vacosta@veltek.com.ec

### FINLAND

SKS Control  
T: +358 207 6461  
control@sks.fi

### GUATEMALA

MICE S.A.  
T: +502 5510 2093  
cesar.espana@miceautomation.com

### HUNGARY

Control-VH Kft  
T: +361 431 1160  
info@controlvh.hu

### ICELAND

Samey ehf  
T: +354 510 5200  
samey@samey.is

### INDONESIA

PT. Apikon Indonesia  
T: +65 6556 1100  
controltechniques.sg@emerson.com

### PT. Yusa Esa Sempurna Sejahtera

T: +65 6556 1100  
controltechniques.sg@emerson.com

### ISRAEL

Dor Drives Systems Ltd  
T: +972 3900 7595  
info@dor1.co.il

### KENYA

Kassam & Bros Co. Ltd  
T: +254 2 556 418  
kassambros@africaonline.co.ke

### KUWAIT

Emerson FZE  
T: +971 4 8118100  
ct.kuwait@emerson.com

### LATVIA

EMT  
T: +371 760 2026  
janis@emt.lv

### LEBANON

Black Box Automation & Control  
T: +961 1 443773  
info@blackboxcontrol.com

### LITHUANIA

Elinta UAB  
T: +370 37 351 987  
sales@elinta.lt

### MALTA

Mekanika Limited  
T: +35621 442 039  
mfranca@gasan.com

### MOROCCO

Cietec  
T: +212 22 354948  
cietec@cietec.ma

### NEW ZEALAND

Advanced Motor Control. Ph.  
T: +64 (0) 274 363 067  
info.au@controltechniques.com

### PERU

Intech S.A.  
T: +51 1 348 5858  
ventas@intech-sa.com

### Tecno Ingeniería Industrial SAC

T: +51 1 445 3608  
jforero@tecnoing.com

### PHILIPPINES

Control Techniques Singapore Pte. Ltd.  
T: +65 68917600  
controltechniques.sg@emerson.com

### POLAND

APATOR CONTROL Sp. z o.o  
T: +48 56 654 4900  
info@acontrol.com.pl

### PORTUGAL

HARKER SOLUTIONS, S.A.  
Tel: +351 229 478 530  
geral@harkersolutions.com

### PUERTO RICO

Motion Industries Inc.  
T: +1 787 251 1550  
roberto.diaz@motion-ind.com

Control Associates of Puerto Rico LLC  
T: +1 (787) 783 9200  
pr-sales@control-associates.com

### QATAR

Emerson FZE  
T: +971 4 8118100  
ct.qatar@emerson.com

### ROMANIA

C.I.T. Automatizari  
T: +40212550543  
office@citautomatizari.ro

### SAUDI ARABIA

A. Abunayyan Electric Corp.  
T: +9661 477 9111  
aec-salesmarketing@abunayyanguroup.com

### SERBIA & MONTENEGRO

Master Inzenjering d.o.o  
T: +381 24 525 235  
office@masterinzenjering.rs

### SLOVENIA

PS Logatec  
T: +386 1 750 8510  
ps-log@ps-log.si

### URUGUAY

SECIOIN S.A.  
T: +5982 2093815  
jose.barron@secioin.com.uy

### VENEZUELA

Digimex Sistemas C.A.  
T: +58 243 551 1634  
digimex@digimex.com.ve

### VIETNAM

Nguyen Duc Thinh Technology & Trading Co. Ltd.  
T: +84 8 3916 5601  
infotech@nducthinh.com.vn